

Job name:	Date:
Scheduled Reference:	Contractor:

System information



AHRI number	\	217287915
Outdoor Model	\	WLUD36W/A-D(U)
Indoor Model	\	WLUD24AH2/A-D(U)
System Rating		
Cooling Capacity	Btu/h	24000
Heating Capacity	Btu/h	24000
Power Supply	\	#
SEER2	\	17
EER2	\	12
HSPF2	\	9
Gas Pipe	inch (mm)	3/4 (19)
Liquid Pipe	inch (mm)	3/8 (9.52)
Pre-charge Pipe Length	ft (M)	31.2 (9.5)
MAX. refrigerant pipe length between Indoor and Outdoor	ft (M)	164 (50)
MAX. Vertical Height difference between Indoor and Outdoor	ft (M)	49.2 (15)
Factory Charge	oz	148.2
Connection Method	\	Screw Connection (standard)
Refrigerant Type	\	R410A




Features:



- High efficiency DC Inverter Technology
- Compact and quiet side discharge unit
- Match with TrueNorth or 3rd party indoor unit
- 24V thermostat compatible
- Low ambient cooling to 5°F (-15°C)
- Low ambient heating to -22°F (-30°C)




Outdoor Data and Dimensions

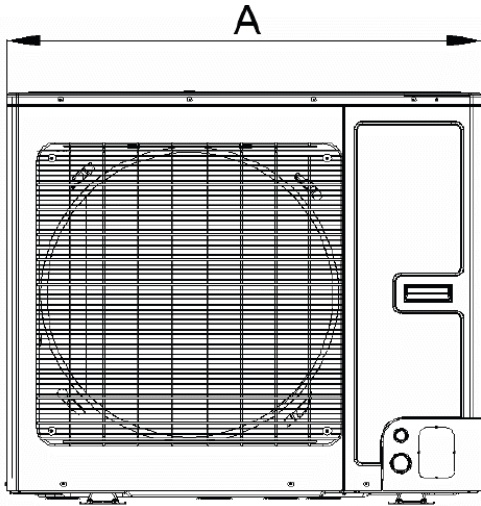

Outdoor Unit Data		
Sound Pressure Level	dB(A)	53.5(45 Min - 62 Max)
Min/Max Voltage	V	187-253
Control Voltage	V	24
Rated Current Cooling	A	13
Rated Current Heating	A	17
MCA	A	24
MOP	A	35
Dimension (HxWxD)	inch (mm)	32 1/4 x 37 x 18 1/8 (820 x 940 x 460)
Net Weight	lb (Kg)	217.2 (98.5)
Gross Weight	lb (Kg)	240.3 (109)
Operating Temperature for Cooling	°F/°C	5~129.2 (-15~54)
Operating Temperature for Heating	°F/°C	-22~75.2 (-30~24)

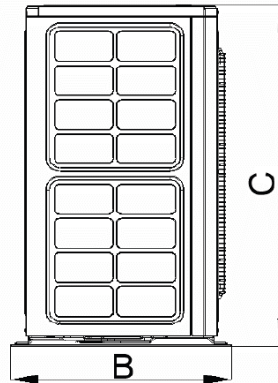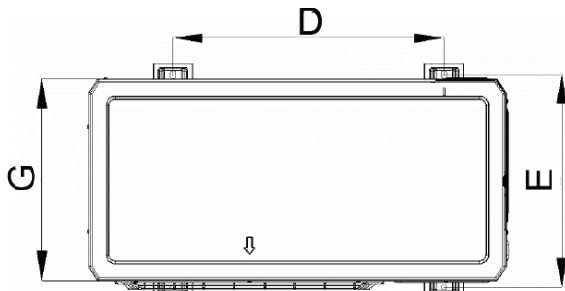


Dimensions	
A	37
B	20 1/8
C	32 1/4
D	24
E	19 1/8
G	18 1/8

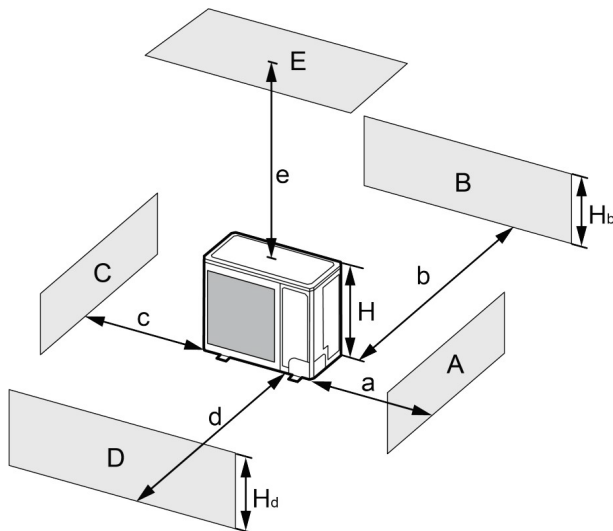

A~E	H _b	H _d	H	(in)				
				a	b	c	d	e
B	—	—	—	-	≥ 4	-	-	-
A,B,C,	—	—	—	≥ 12	≥ 4	≥ 4	-	-
B,E	—	—	—	-	≥ 4	-	-	≥ 40
A,B,C,E	—	—	—	≥ 12	≥ 6	≥ 6	-	≥ 40
D	—	—	—	-	-	-	≥ 40	-
D,E	—	—	—	-	-	-	≥ 40	≥ 40
B,D	H _b < H _d	H _d > H	-	≥ 4	-	≥ 40	-	-
	H _b > H _d	H _d < H	-	≥ 4	-	≥ 40	-	-
B,D,E	H _b < H _d	H _b ≤ 1/2H	-	≥ 10	-	≥ 80	≥ 40	≥ 40
		1/2H < H _b ≤ H	-	≥ 10	-	≥ 80	≥ 40	
	H _b > H	Prohibited						
	H _b > H _d	H _d ≤ 1/2H	-	≥ 4	-	≥ 80	≥ 40	≥ 40
		1/2H < H _d ≤ H	-	≥ 8	-	≥ 80	≥ 40	≥ 40
H _d > H	Prohibited							

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.

Indoor data and Dimensions

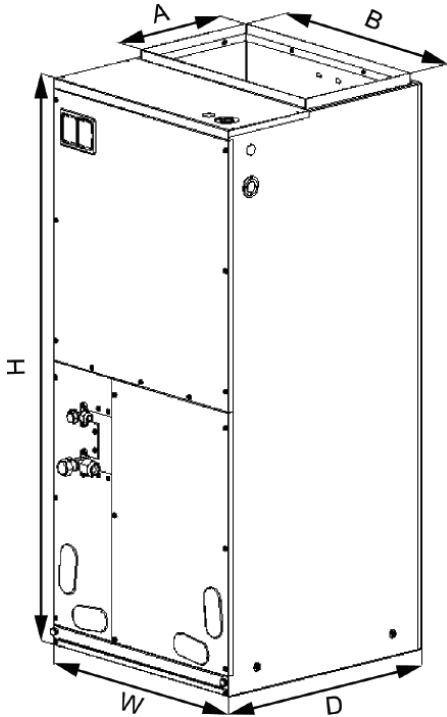

Indoor Unit Data		
Air Flow Volume	CFM (m ³ /h)	720 (1224)
ESP	in.w.g (Pa)	0.0~1.0 (0~250)
Sound Pressure Level	dB(A)	45
Supplemental Electric Heat (Optional)	KW	(5) (8)
Dehumidification	pt/hr	3.06
Min/Max Voltage	V	187-253
Control Voltage	V	24
Rated Current Cooling	A	2.1
Rated Current Heating	A	2.1
MCA	A	4
MOP	A	15
MOP / Electric Heater	A	(30) (45) 208-240V
Dimension (HxWxD)	inch (mm)	48 1/4 x 21 1/4 x 21 1/4 (1224 x 540 x 540)
Net Weight	lb (Kg)	156.5 (70)
Gross Weight	lb (Kg)	169.8 (77)

Dimensions	
A	11 5/8
B	20
H	48 1/4
W	21 1/4
D	21 1/4

Heat Kit Model	Electric Heat (KW)		Min. Circuit (Amps)		Max.Fuse or Breaker (Amps)	
	240V	208V	240V	208V	240V	208V
EHH21422700-5KW	5	3.76	26	22.6	30	25
EHH21421600-8KW	8	6	41.7	36	45	40
EHH21421601-10KW	10	7.51	52	45	60	45
EHH21421700-15KW	15	11.25	52 & 26	45 & 22.6	60 & 30	45 & 25

Filter Size	
*Supplied filter is metal mesh	
Supplied*	19 1/4 x 20 1/4 x 1/2
Suggested	19 1/4 x 20 1/4 x 1

Optional Smart thermostat bundle

WK-010WC1

WK-010WD1

