

Submittal-60K-UltraHeat

TRUENORTH
POWERED BY GREE

Job name:		Submitted by:	
Location:		Submitted to:	
Engineer:		Unit tag:	
Date:		Drawing number:	

Warranty information

Standard 7 years parts & compressor
Registered 12 years parts & compressor
Terms and conditions apply

Type

Energy Star

Cold Climate Energy Star

Model numbers

Indoor:	WLCAC36F/NhA
Outdoor:	WLUD60W2/NhE-D(U)

Capacity range

Output (BTU/H)	Minimum	Rated	Max	Certification		
Cooling:	15200	52000	53100	AHRI NO.	Energy Star	ne ep
Heating:	14400	54000	54000			

Heating performance

Output (BTU/H)	Minimum	Rated	Max	Efficiency Ratings	
				SEER2	16
47F (8.3C)				HSPF2	9
17F (-8.3C)				EER2	9.8
5F (-15C)				COP	3.1

Outdoor temperature range


Cooling:	-15-54C	5-129F	Electrical	
Heating:	-30-24C	-22-75F	Power supply	208-230V/60Hz/1Ph
			Min/Max voltage	187-253Vac

Condenser specifications

Connecting type	Screw Connection	MCA	39A
Pre-charge length	25ft (7.5M)	MOP	45A
MIN. Refrigerant Pipe Length	10 ft (3M)	Power Supply Wire	8/2 AWG
Liquid Pipe Size	3/8in (9.52mm)	Interconnecting Wire	18/6AWG or 18/2AWG

Gas Pipe Size	3/4in (19mm)	Features	
Max Height Between Indoor/Outdoor	50ft (15M)	Electronic expansion valve	
Max. Pipe Length	100ft (30M)	Rotary compressor	
Refrigerant Type	R-32	Basepan heater	
Factory Charge	162oz	Compressor electric heater	

Weight			
Additional Charge	0.3 oz/ft	Gross weight:	263.5Lbs (119.5Kg)
Sound Pressure Level	62dB (A)	Net weight:	241.4Lbs (109.5Kg)



R32




Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.


TRUENORTH Outdoor unit Dimensions

POWERED BY GREE

WLUD60W2/NhE-D(U)

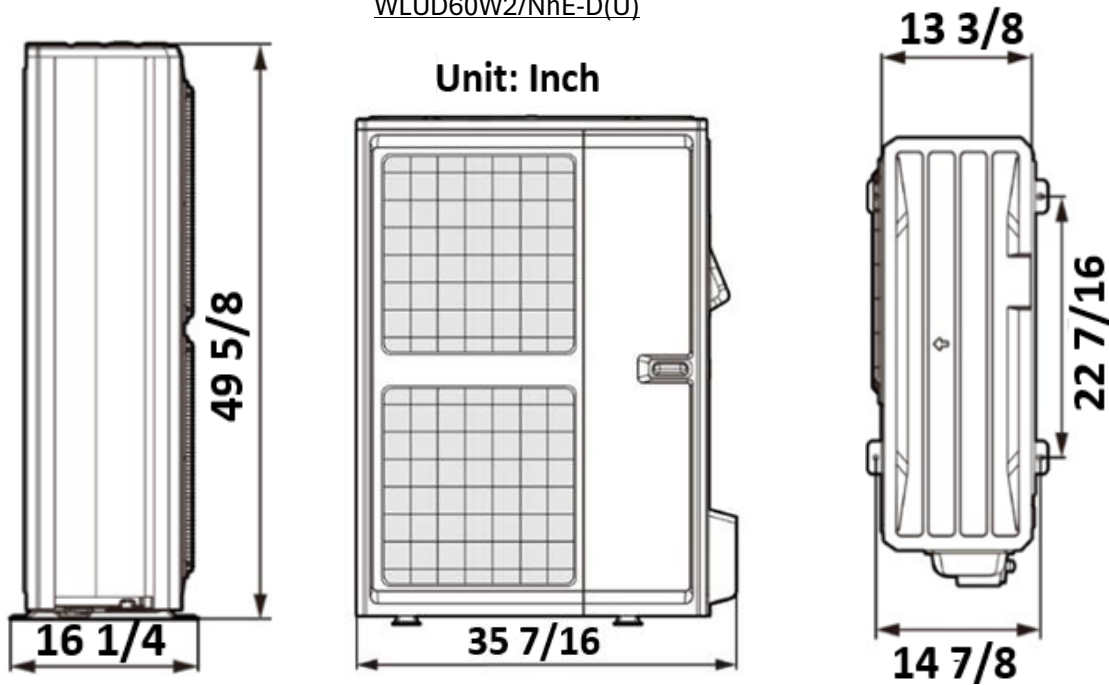

Minimum outdoor unit clearances

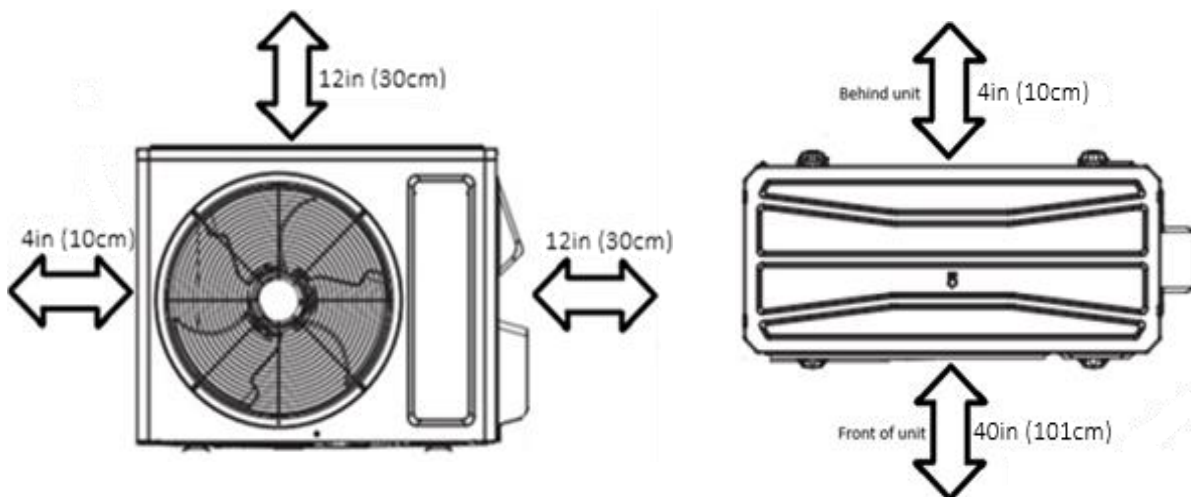

Unit must be placed a minimum 18in (45cm) above any surfaces to allow for snow clearance and defrost runoff.


Please follow local best practices and guidelines.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.



Indoor unit specifics

WLCAC36F/NhA

Move to the left:



Move to the right:

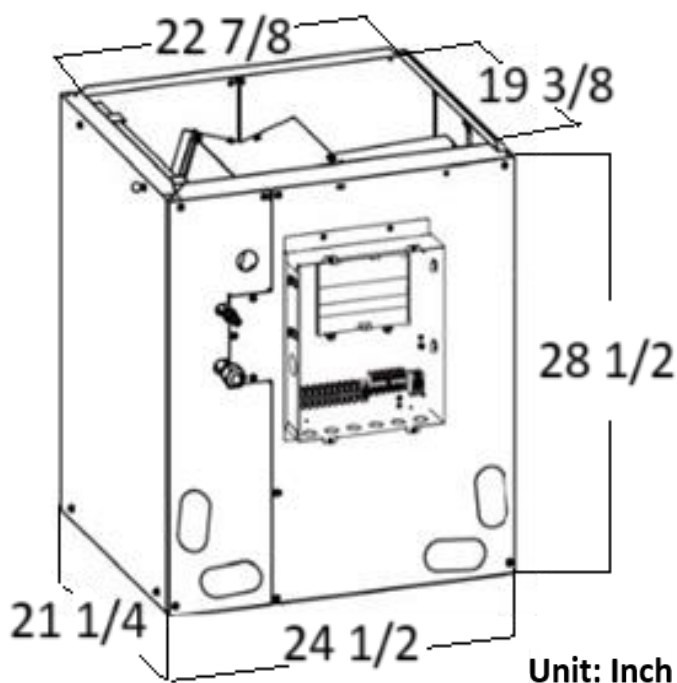

Unit: Inch

Control board can be moved according to installation needs

Optional Smart thermostat		Technical Specifications	
WK-010WC01 and WK-010WD1		Power Supply	24V/60Hz/1Ph
		Throttling method	Electronic Expansion Valve
		Connection method	Screwed
		Liquid pipe size	3/8in (9.52mm)
		Gas pipe size	3/4in (19mm)
		Net weight	110 lbs (50Kg)
		Gross Weight	123.5 Lbs (56Kg)
		Drain Pipe Outlet	SCH 40 3/4
		Includes R32 Refrigerant Sensor	
		Can be installed horizontally	