

Submittal-24K-ECO

TRUENORTH
POWERED BY GREE

Job name:		Submitted by:	
Location:		Submitted to:	
Engineer:		Unit tag:	
Date:		Drawing number:	

Warranty information

Standard 7 years parts & compressor
Registered 12 years parts & compressor
Terms and conditions apply

Type

Energy Star Heat Pump ☐
Cold Climate Energy Star Heat Pump ☐

Model numbers

Indoor:
Outdoor: WLUD24W2/Nh-D(U)

Capacity range



R32 

Output (BTU/H)		Minimum	Rated	Max	Certification		
Cooling:		11400	24000	24500	AHRI NO.	Energy Star	
Heating:		10800	24000	24800			
Heating performance					Efficiency Ratings		
Output (BTU/H)		Minimum	Rated	Max	SEER2	18.5	
47F (8.3C)					HSPF2	8.3	
17F (-8.3C)					EER (W/W)	3.43	
5F (-15C)					COP (W/W)	3.5	
Outdoor temperature range					Electrical		
Cooling:	-15-48C		5-118F		Power supply	208-230V/60Hz/1Ph	
Heating:	-15-24C		5-75F		Min/Max voltage	187-253Vac	
Condenser specifications					MCA	21A	
Connecting type			Screw Connection		MOP	25A	
Pre-charge length			25ft (7.5M)		Power Supply Wire	10/3 AWG	
MIN. Refrigerant Pipe Length			10 ft (3M)		Interconnecting Wire	18/6AWG or 18/2AWG	
Liquid Pipe Size			3/8in (9.52mm)		Features:		
Gas Pipe Size			3/4in (19mm)		Electronic expansion valve		
Max Height Between Indoor/Outdoor			50ft (15M)		Rotary compressor		
Max. Pipe Length			100ft (30M)		Basepan heater		
Refrigerant Type			R-32		Compressor electric heater		
Factory Charge			67oz		Weight		
Additional Charge			0.2 oz/ft		Gross weight:	122.4Lbs (55.5Kg)	
Sound Pressure Level			56dB (A)		Net weight:	113.5Lbs (51.5Kg)	


Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.

TRUENORTH Outdoor Unit Dimensions


POWERED BY GREE

WLUD24W2/Nh-D(U)

Unit: Inch

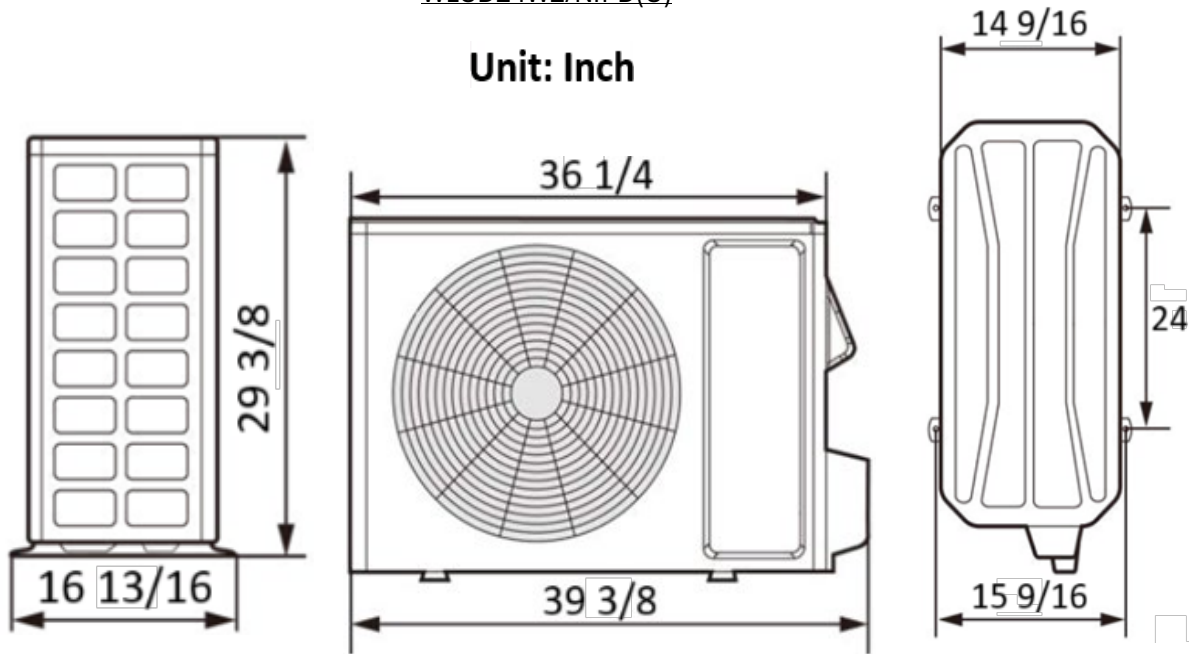

Minimum outdoor unit clearances

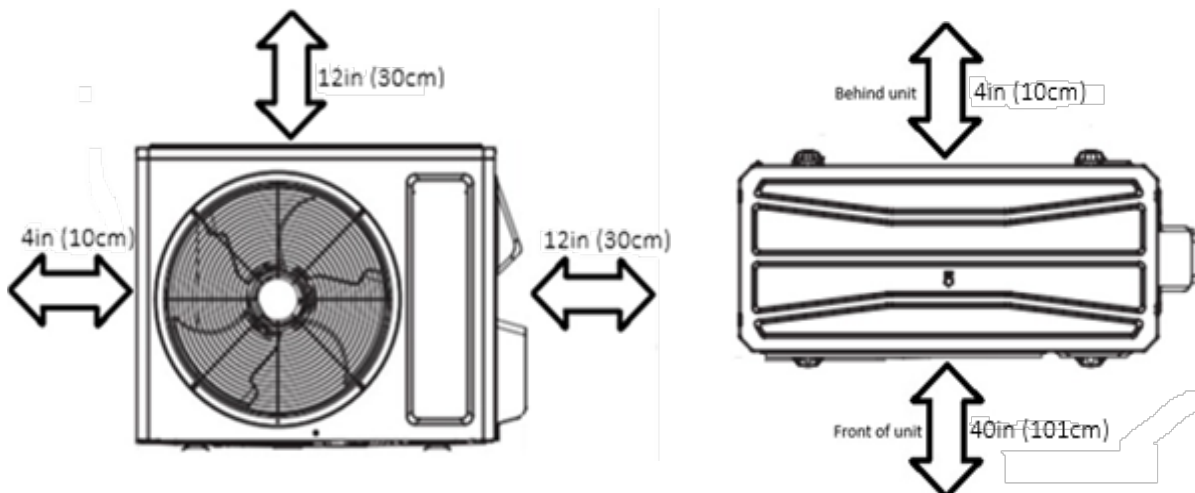

Unit must be placed a minimum 18in (45cm) above any surfaces to allow for snow clearance and defrost runoff.

Please follow local best practices and guidelines.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.